

# IC-GM1600E



## GMDSS Portable for Survival Craft

- **Meets the strict environmental requirements for survival craft radio**

The IC-GM1600E meets temperature, thermal shock, vibration and drop resistant (from 1 m height) requirements. After passing those environmental tests, the IC-GM1600E retains 1m depth waterproof construction as specified by IMO resolutions A.809(19), A.694(17) and related specifications.

- **Optional high capacity Lithium battery, BP-234, has superior low temperature characteristics**

Provides more than 8 hours operating time even at -20°C.  
(Duty cycle: Tx: Rx: Stand-by = 6: 6: 48)

- **Large keypad with positive button action**

- **Wide viewing angle LCD display**

- **Meets MED 96/98/EC, "Wheel mark" requirements**



- **Other features**

- One touch access to Channel 16 and call channel
- Highly visible yellow colored body
- Bright LED indicator on the top of panel



## SPECIFICATIONS

### GENERAL

- Frequency range Tx/Rx : 156.300–156.875MHz
- Mode : FM (16K0G3E)
- Power supply requirement : 7.2V DC nominal
- Current drain (approx. at 7.2V DC) :
  - Tx 2W output 1.0A
  - 1W output 0.7A
  - Rx AF max. 200mA
- Operating Temp. range : -20°C to +55°C
- Antenna impedance : 50Ω (SMA fixed-type)
- Dimensions (W×H×D) : 65×145×44 mm (projections not included)
- Weight (approx.) : 385g (with BP-234)

### TRANSMITTER

- Output power : 2W/1W (Hi/Low)
- Max. frequency deviation: ± 5.0kHz
- Frequency error : ± 1.5kHz
- Spurious emissions : 0.25μW (30MHz–1GHz)  
1.00μW (1GHz–2GHz)
- Adjacent channel power : 70dB
- FM Hum and noise ratio : 40dB
- Audio harmonic distortion : Less than 10% (at 60% deviation)

### RECEIVER


- Sensitivity (20dB SINAD) : -2dBμ typ. (emf)
- Squelch sensitivity : ±0dBμ typ. (emf) (at threshold)
- Adjacent channel selectivity : 70dB
- Spurious response : 70dB
- Intermodulation rejection: 68dB
- Hum and noise ratio : 40dB
- Audio output power : 0.2W (at 10% distortion with an 8Ω load)

### Supplied accessories: (\* Depending on version)

- Battery pack, BP-252\*
- Battery charger, BC-173\*
- AC adapter, BC-147\*
- Belt clip, MB-103Y
- Antenna, FA-S61V (fixed)
- Neck strap

Measurement made in accordance with IEC61097-12.  
All stated specifications are subject to change without notice or obligation.  
To comply with the requirements of GMDSS survival craft radio, the primary battery pack, BP-234, is required.

### DIMENSIONS

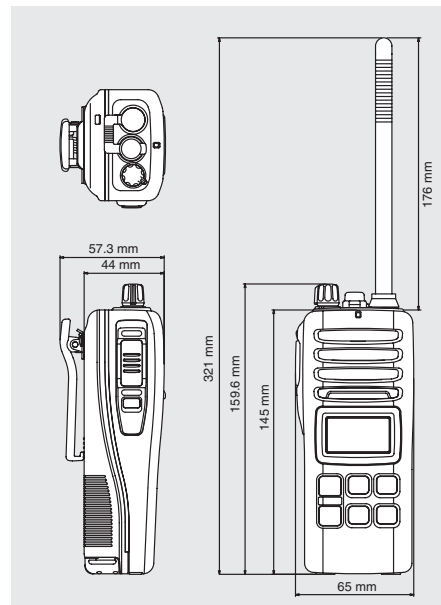

## OPTIONS

### LITHIUM BATTERY PACK



**BP-234**

<For survival craft>  
**BP-234** LITHIUM BATTERY PACK  
9.0V/3300mAh primary battery pack for GMDSS survival craft radio.

### Li-Ion BATTERY PACK



**BP-252**

<For on-board use>  
**BP-252** Li-Ion BATTERY PACK  
7.4V/950mAh (min), 980mAh (typ.).  
Same as supplied with some versions.

### REGULAR CHARGER



**BC-147**

**BC-173**

<For on-board use>  
**BC-173** DESKTOP CHARGER  
+ **BC-147**\* AC ADAPTER  
Regularly charges the battery pack, BP-252 in 10 hours (approx.).

\*1 BC-147SE for 230V AC. SA for 120V AC. SV for 240V AC.

### BELT CLIP



**MB-103Y**

**MB-103Y** BELT CLIP  
Alligator type belt clip. Same as supplied.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries.

**Icom Inc.** 1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 [www.icom.co.jp/world](http://www.icom.co.jp/world) **Count on us!**

### Icom America Inc.

2380 116th Avenue NE,  
Bellevue, WA 98004, U.S.A.  
Phone : +1 (425) 454-8155  
Fax : +1 (425) 454-1509  
E-mail : [sales@icomamerica.com](mailto:sales@icomamerica.com)  
URL : <http://www.icomamerica.com>

### Icom Canada

Glenwood Centre #150-6165 Highway 17,  
Delta, B.C., V4K 5B8, Canada  
Phone : +1 (604) 952-4266  
Fax : +1 (604) 952-0090  
E-mail : [info@icomcanada.com](mailto:info@icomcanada.com)  
URL : <http://www.icomcanada.com>

### Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,  
Clayton, VIC 3168 Australia  
Phone : +61 (03) 9549 7500  
Fax : +61 (03) 9549 7505  
E-mail : [sales@icom.net.au](mailto:sales@icom.net.au)  
URL : <http://www.icom.net.au>

### Icom New Zealand

146A Harris Road, East Tamaki,  
Auckland, New Zealand  
Phone : +64 (09) 274 4062  
Fax : +64 (09) 274 4708  
E-mail : [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz)  
URL : <http://www.icom.co.nz>

### Icom (Europe) GmbH

Communication Equipment  
Auf der Krautweide 24  
65812 Bad Soden am Taunus, Germany  
Phone : +49 (6196) 76685-0  
Fax : +49 (6196) 76685-50  
E-mail : [info@icomeurope.com](mailto:info@icomeurope.com)  
URL : <http://www.icomeurope.com>

### Icom Spain S.L.

Ctra. Rubi, No. 68 "Edificio Can Castanyer"  
Bajos A 08174, Sant Cugat del Valles,  
Barcelona, Spain  
Phone : +34 (93) 590 26 70  
Fax : +34 (93) 589 04 46  
E-mail : [icp@icomspain.com](mailto:icp@icomspain.com)  
URL : <http://www.icomspain.com>

### Icom (UK) Ltd.

Blacksale House, Altira Park,  
Herne Bay, Kent, CT6 6GZ, U.K.  
Phone : +44 (01227) 741741  
Fax : +44 (01227) 741742  
E-mail : [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
URL : <http://www.icomuk.co.uk>

### Icom France s.a.s.

Zac de la Plaine,  
1 Rue Brindejonec des Moulinais, BP 45804,  
31505 Toulouse Cedex 5, France  
Phone : +33 (5) 61 36 03 03  
Fax : +33 (5) 61 36 03 00  
E-mail : [icom@icom-france.com](mailto:icom@icom-france.com)  
URL : <http://www.icom-france.com>

### Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland  
Phone : +48 (58) 550 7135  
Fax : +48 (58) 551 0484  
E-mail : [icompolska@icompolska.com.pl](mailto:icompolska@icompolska.com.pl)  
URL : <http://www.icompolska.com.pl>

### Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone : +886 (02) 2559 1899  
Fax : +886 (02) 2559 1874  
E-mail : [sales@asia-icom.com](mailto:sales@asia-icom.com)  
URL : <http://www.asia-icom.com>

Your local distributor/dealer: